


**Model: RMM-19**  
**8.5U, 19" Rack mount 19" TFT LCD monitor**

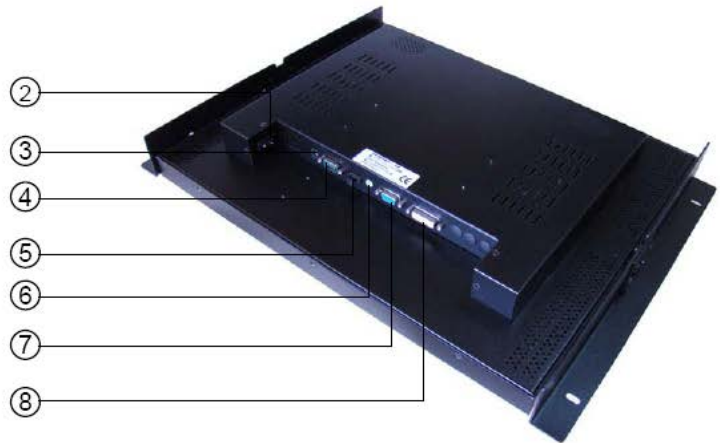

- 1. OSD button
- 2. Power Switch

- 3. DC Jack
- 4. TouchScreen COM Port

- 5. TouchScreen USB Port
- 6. Audio-in

- 7. VGA-IN
- 8. DVI-IN

**Main Feature**

- 8.5U, 19" Rack mount 19" TFT LCD monitor
- 90° tilt adjustment while mounted in rack: +45° ~-45°

Specification	
<b>Product Model</b>	<b>RMM-19</b>
<b>LCD Panel</b>	Display Type : 19" SXGA TFT LCD Resolution : 1280×1024 Max. color : 16.7M Luminance : 300 cd/m2 View Angel : 178°(H) , 178°(V) Pixel Pitch : 0.294 x 0.294 mm Contrast Ratio : 1000 : 1 Response Time : 5 ms Power Consumption : 23.25W LCD MTBF : 50,000hrs
<b>Signal Input</b>	VGA ( 15 pin D-sub connector ) + DVI (DVI-D) + audio input ( audio jack )
<b>OSD</b>	Brightness, Contrast, H/V Position, Color, Phase, Clock, Management
<b>Signal Connectivity ( optional )</b>	AV input (BNC)
<b>DC Power Input ( optional )</b>	Wide range DC 7V-28V input
<b>Power Supply</b>	DC12V@ 4A /48W ,external ac adapter
<b>Speaker</b>	2x2 W Stereo internal speaker
<b>Construction</b>	Heavy duty steel
<b>Environment</b>	Operating temperature: 32 °F-113 °F (0 °C to 45 °C) Storage temperature: -4 °F-140 °F (-20 °C to 60 °C) Storage humidity: 10% to 95%@ 40°C , on-condensing

	Vibration: 10 ~ 150Hz, 0.15mm 10 cycles 1G Shock: 30G peak acceleration (11 msec. duration)
Safety	CE/FCC/Rohs
Dimension W x H x D ( mm )	Dimensions: 482.6x377x 60mm Packing Dimension: 610x510x195mm
Weight	NET weight: 9.2KG Gross weight: 12KG

### Ordering Information

RMM-19	8.5U, 19" Rack mount 19" TFT LCD monitor
Optional: DC	Support DC input (7-28VDC)
Optional: AV	Support AV Input (BNC)

### Structure Diagram

Unit :mm

